


MODEL 7320
CENTER UPRIGHT POST

MODEL 7315
WINCH POST

MODEL 7310
UPRIGHT POST

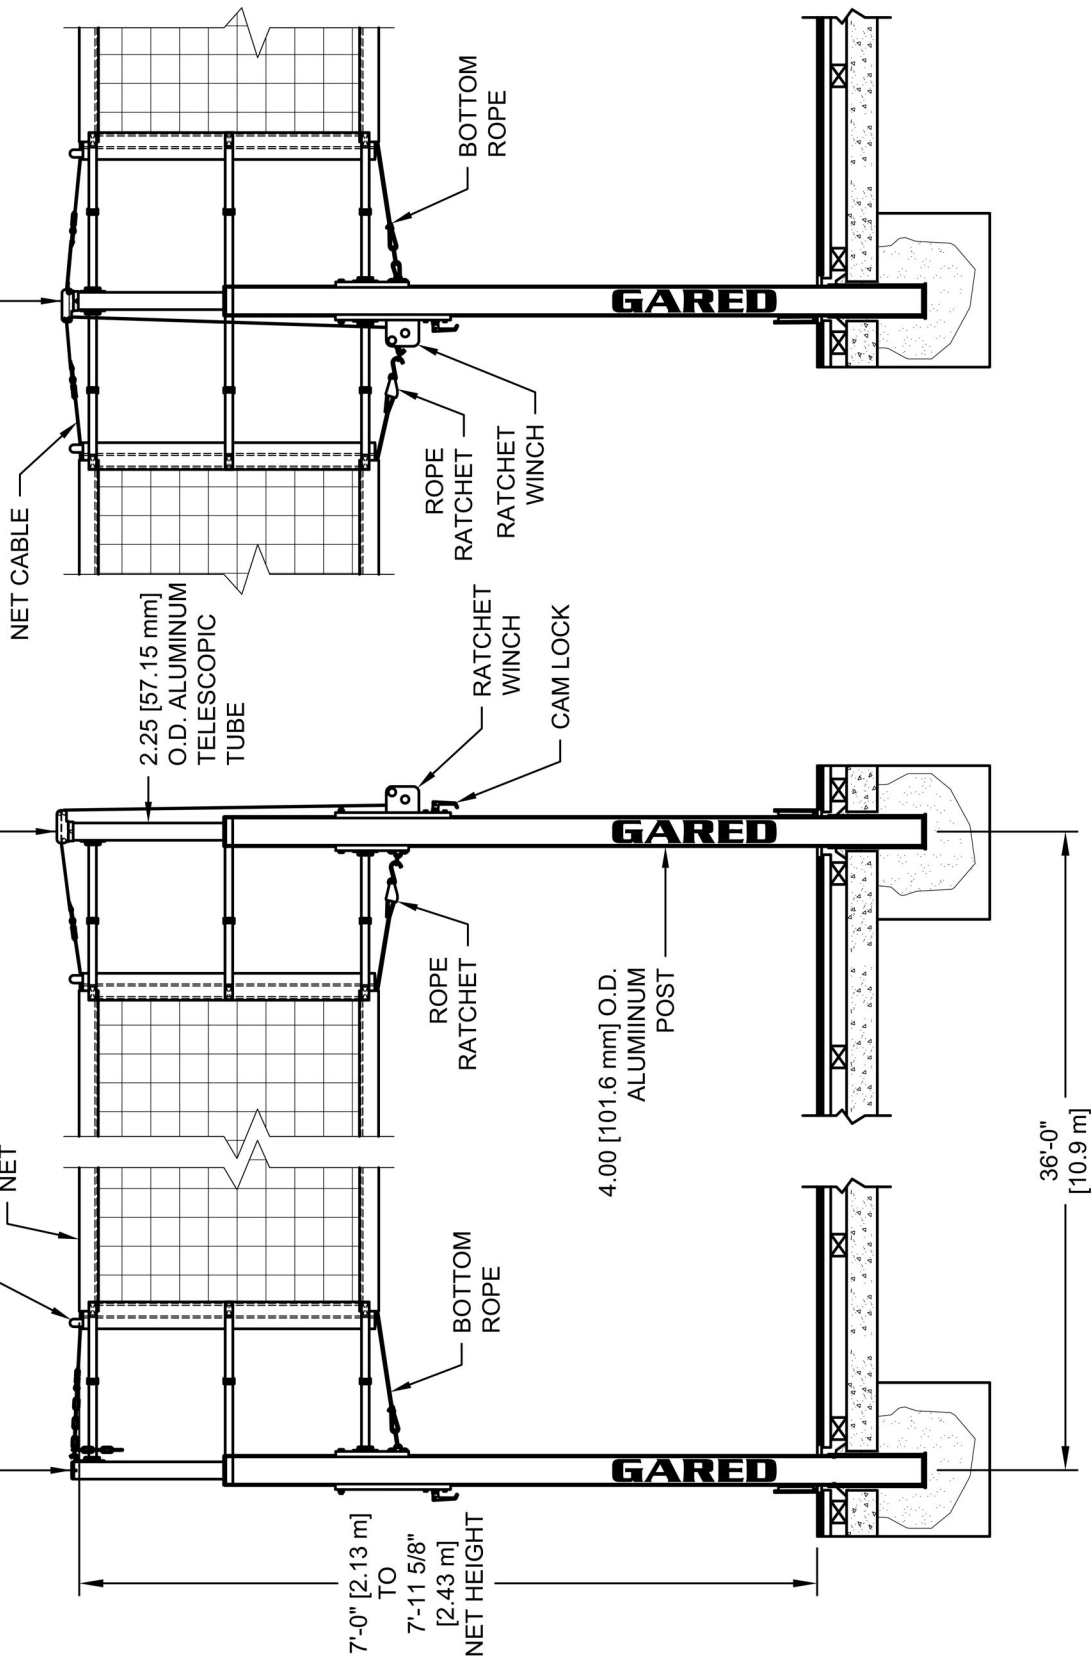

7310, 7315, 7320 MASTER TELESCOPIC VOLLEYBALL SYSTEM

REVISION		
REV.	DATE	BY
A	12/17/03	MJB
B	04/25/05	ATS
C	06/12/08	RWP



Gared Holdings, LLC
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

VOLLEYBALL SYSTEM

DRAWN	CONNERLEY	DATE	05/09/03	MATERIAL	N/A
APPROVED	JJC	DATE	05/09/03	FINISH	N/A
FILE LOC.	Q:\Final Release\Specifications			DWG. NO.	7310, 7316, 7320
SIZE	SCALE	SHT. NO.	PART NO.	REV	
A	NONE	1 OF 1	7300	C	



MODEL 7300

MASTER VOLLEYBALL SYSTEM

RECOMMENDED APPLICATION

Top quality unit for use in high-level volleyball programs and showcase facilities. Meets all grade school, middle school, high school, YMCA, club, and NCAA requirements for play.

FLOOR SLEEVES AND COVER PLATES

Please refer to attached specification

UPRIGHTS

Upright post shall be 6063-T6 aluminum; 4" diameter post with weight of 34 lbs. Finish shall be gray anodize. Upright post shall be removable type with sleeves and covers a permanent fixture to the floor. Telescopic tube shall be 2-1/4" diameter aluminum tube. Net height shall be achieved by sliding the telescopic tube up or down and locking the telescopic tube in place with wedge type locking mechanism mounted on sliding rail. Telescopic tube to glide easily with spring assisted mechanism. Net heights range from 7'-0" to 7'-11 5/8". Post can collapse down to a total length of 8'-2 1/2". Upright post shall have high impact plastic caps on ends of the post for floor protection.

NET TENSIONER (WINCH)

The net tensioner shall incorporate a heavy duty, self-locking ratchet mechanism with a compression clutch brake type release. A high tensile nylon strap will be used with the winch to achieve required net tension.

NET

Net features include 1" diameter wood dowel and 4" square black nylon mesh (250-lbs tensile strength) for excellent performance and durability. Free floating net along 1/8" diameter steel 7 x 19 cable (1,760-lbs. Minimum breaking strength) allows for quick and easy centering of net about the court lines. Nylon straps with Velcro® backing are used to secure net in place. Net shall be 32' length and 39" width. Net perimeter shall have a 2" wide vinyl coated polyester hem that is double stitched. Net meets or exceeds all requirements for most levels of competition.

UPRIGHT PADS

Upright safety pads shall be one single piece 72" in height. Padding shall be constructed with 1 1/2" thick cross-linked polyethylene closed cell foam covered with 14-ounce nylon reinforced vinyl. Attachment to uprights shall be with Velcro® straps. Standard Colors are: white, yellow, orange, red, kelly green, forest green, royal blue, marine blue, navy blue, gray, black, maroon, beige, and purple.

NET ANTENNA AND TAPE

Net antenna shall be 3/8" diameter fiberglass rods 72" long with alternating red and white bands. Net tape shall be white nylon reinforced vinyl 2 1/2" wide with full-length pocket to accept the antenna. Attachment to net shall be full-length quick action Velcro® closures.

AVAILABLE OPTIONS

Center Post Uprights for multi-court applications
Referee Stand with optional padding
Storage Cart

Subject to design change and current manufacturing practices.
Revised April 4, 2008 ©2008 Gared Holdings, LLC