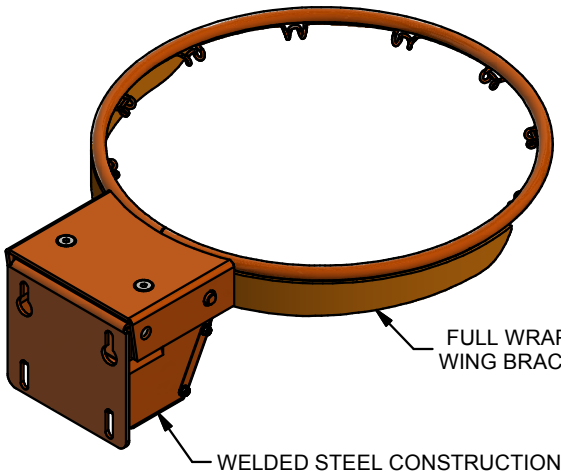



POSITIVE LOCK DETENT MECHANISM



DUAL RETURN SPRINGS

FINISH IS OFFICIAL ORANGE POWDER COAT

GOAL IS SUPPLIED WITH ANTI-WHIP NYLON NET AND MOUNTING HARDWARE

SHIPPING WEIGHT 25 LBS [11.3 Kg]

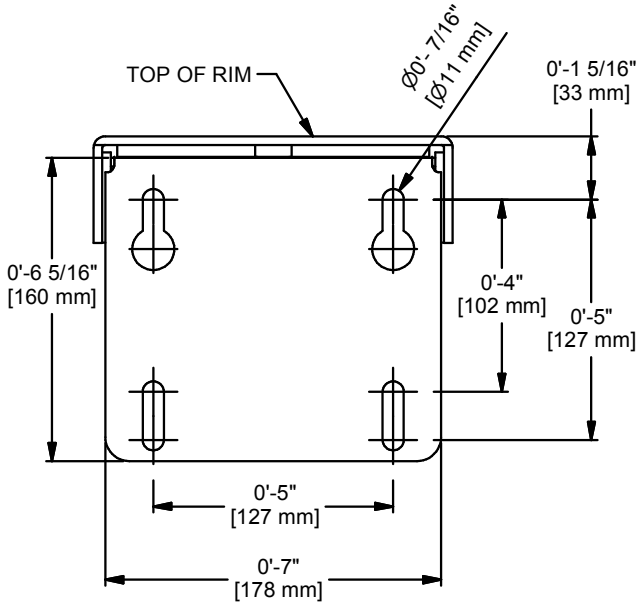

MOUNTING PLATE VIEW

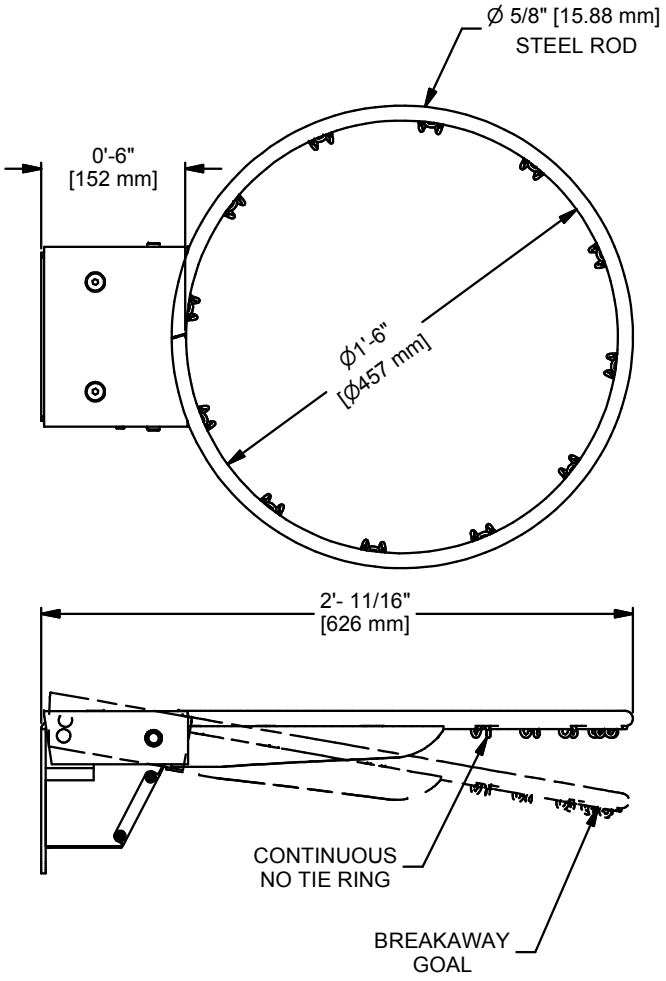

REV	BY	DATE
E	JJC	11/17/17
D	RWP	04/21/08
C	WAE	12/20/16
B	JJC	12/03/03
A	JJC	10/17/03

PSS PERFORMANCE SPORTS SYSTEMS

GARED™

Gared Holdings, LLC
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

COLLEGIATE GOAL, BREAKAWAY POSITIVE LOCK

DRAWN	DATE	DATE ISSUED
CONNERLEY	5/8/2003	
APPROVED	DATE	

FILE LOC. Q:\Inventor Files\Specification Files\08_Goals

SIZE	SCALE	SHT. NO.	PART NO.	REV
A	NONE	1 OF 2	2000+	E

MODEL 2000+

POSITIVE LOCK BREAK-AWAY GOAL

The 2000+ goal shall be constructed with an enclosed positive lock mechanism to hold rim in solid playing position. Goal shall be designed so that any possible entrapment areas have been eliminated.

Goal shall have official size 18" ring of 5/8" diameter steel with continuous no-tie net attachment, full wing brace design, and a durable orange powder coated finish. Anti-whip net and hardware shall be included. Hole spacing shall be 5" x 5". Goal shall meet NCAA and high school specifications.

ACCESSORIES

BACKBOARDS

See Goal-Board Matrix specification sheet for board compatibility.

Subject to design change and current manufacturing practices.